




600NaNo

## BALL TYPE LONG NECK - 2 flutes

WC=90 Co=10 HV30 = 1571 Rupture=3750N/mm<sup>2</sup> Grain Size=0.6µm

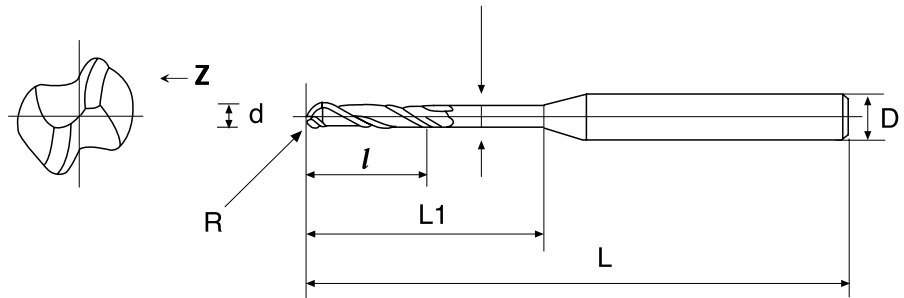

### LNBT - Altin


MODE	Diameter d	Flute Length l	Full Length L	Shank Diameter D	Efficient Length L1	radius of Ball Nose R	Flute No. Z
LNBT 05022T	0.5	0.75	50	4	2	0.25	2
LNBT 05042T	0.5	0.75	50	4	4	0.25	2
LNBT 05062T	0.5	0.75	50	4	6	0.25	2
LNBT 06022T	0.6	0.9	50	4	2	0.3	2
LNBT 06042T	0.6	0.9	50	4	4	0.3	2
LNBT 06062T	0.6	0.9	50	4	6	0.3	2
LNBT 08042T	0.8	1.2	50	4	4	0.4	2
LNBT 08062T	0.8	1.2	50	4	6	0.4	2
LNBT 08082T	0.8	1.2	50	4	8	0.4	2
LNBT 10062T	1	1.5	50	4	6	0.5	2
LNBT 10082T	1	1.5	50	4	8	0.5	2
LNBT 10102T	1	1.5	50	4	10	0.5	2
LNBT 10122T	1	1.5	50	4	12	0.5	2
LNBT 12062T	1.2	1.8	50	4	6	0.6	2
LNBT 12082T	1.2	1.8	50	4	8	0.6	2
LNBT 12102T	1.2	1.8	50	4	10	0.6	2
LNBT 12122T	1.2	1.8	50	4	12	0.6	2
LNBT 14062T	1.4	2.1	50	4	6	0.7	2
LNBT 14102T	1.4	2.1	50	4	10	0.7	2
LNBT 14162T	1.4	2.1	50	4	16	0.7	2
LNBT 15062T	1.5	2.3	50	4	6	0.75	2
LNBT 15082T	1.5	2.3	50	4	8	0.75	2
LNBT 15102T	1.5	2.3	50	4	10	0.75	2
LNBT 15122T	1.5	2.3	50	4	12	0.75	2
LNBT 15142T	1.5	2.3	50	4	14	0.75	2
LNBT 15162T	1.5	2.3	50	4	16	0.75	2
LNBT 15182T	1.5	2.3	50	4	18	0.75	2
LNBT 15202T	1.5	2.3	50	4	20	0.75	2



# 600NaNo

## BALL TYPE LONG NECK - 2 flutes

WC=90 Co=10 HV30 = 1571 Rupture=3750N/mm<sup>2</sup> Grain Size=0.6µm

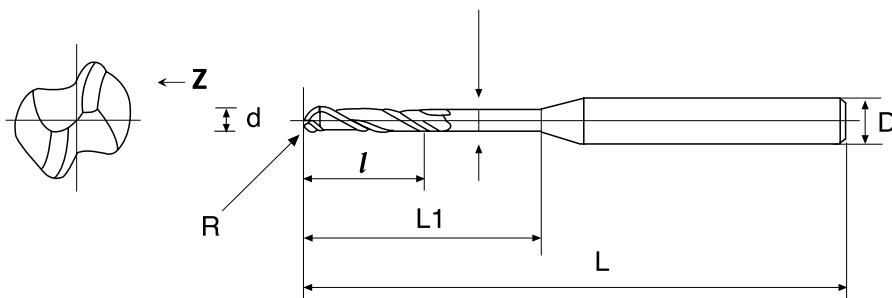

### LNBT - Altin

MODE	Diameter d	Flute Length l	Full Length L	Shank Diameter D	Efficient Length L1	radius of Ball Nose R	Flute No. Z
LNBT 16062T	1.6	2.4	50	4	6	0.8	2
LNBT 16082T	1.6	2.4	50	4	8	0.8	2
LNBT 16102T	1.6	2.4	50	4	10	0.8	2
LNBT 16122T	1.6	2.4	50	4	12	0.8	2
LNBT 16142T	1.6	2.4	50	4	14	0.8	2
LNBT 16162T	1.6	2.4	50	4	16	0.8	2
LNBT 16182T	1.6	2.4	50	4	18	0.8	2
LNBT 16202T	1.6	2.4	50	4	20	0.8	2
LNBT 18082T	1.8	2.7	50	4	8	0.9	2
LNBT 18142T	1.8	2.7	50	4	14	0.9	2
LNBT 18202T	1.8	2.7	50	4	20	0.9	2
LNBT 20082T	2	3	50	4	8	1	2
LNBT 20102T	2	3	50	4	10	1	2
LNBT 20122T	2	3	50	4	12	1	2
LNBT 20142T	2	3	50	4	14	1	2
LNBT 20162T	2	3	50	4	16	1	2
LNBT 20182T	2	3	50	4	18	1	2
LNBT 20202T	2	3	50	4	20	1	2
LNBT 25082T	2.5	4	50	4	8	1.25	2
LNBT 25122T	2.5	4	50	4	12	1.25	2
LNBT 25162T	2.5	4	50	4	16	1.25	2
LNBT 25202T	2.5	4	50	4	20	1.25	2
LNBT 30102T	3	4.5	50	6	10	1.5	2
LNBT 30122T	3	4.5	50	6	12	1.5	2
LNBT 30162T	3	4.5	60	6	16	1.5	2
LNBT 30202T	3	4.5	60	6	20	1.5	2
LNBT 30252T	3	4.5	75	6	25	1.5	2
LNBT 40122T	4	6	50	6	12	2	2
LNBT 40162T	4	6	60	6	16	2	2
LNBT 40202T	4	6	75	6	20	2	2
LNBT 40252T	4	6	75	6	25	2	2
LNBT 40302T	4	6	75	6	30	2	2

MG

HRC  
55

35°



ALTIN

